


AirMaster

AIRMASTER PREVIEW-PROGRAM MODEL

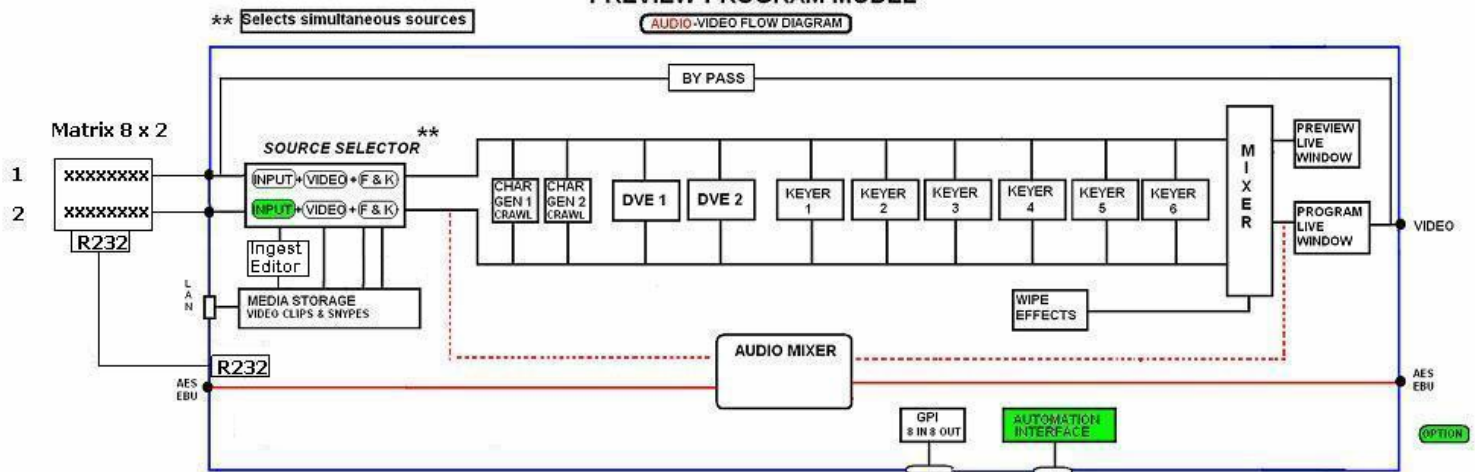

VIDEO

INPUT: Serial Digital SD (SMPTE 259M)
Optional HD (SMPTE 292M)

OUTPUT: Serial Digital SD (SMPTE 259M)
Optional HD (SMPTE 292M)

Reference: Black Burst or Tri-Level SDI

AUDIO

AES/EBU 4 IN 8 OUT (SMPTE 276M)
Embedded 8 stereo pairs per stream (SMPTE 272M)

Auto Bypass Power loss or system problem

VBI: Capture & Pass through

EAS: Option

MULTI-FORMAT CODEC support:

- DVC PRO25/50/100, P2
- XDCAM-SD/HD
- SD & HD MPEG-2 IBP & I frame

Supported Import formats: AVI, MOV, MPEG-2

HARDWARE

Pair of Dual core Intel Xeon processors SD only model
Pair of Quad core Intel Xeon processors SD/HD model
4GB RAM
Internal RAID-5 storage up to 5 TB with hot swap drives
Dual Redundant, power supplies
Hot swap cooling fans
Two RS 232 ports
RS 422 ports, specified with options
GPI 16 In 16 Out, optional 32 In 16 Out
6 USB ports
Internal heat sensor with software monitoring
Gigabit Ethernet
Windows XP license

Specifications are subject to change without notice

Trade marks are the property of their owners

Copyright Spencer Technologies Inc. 2009